

06/05/00

JCS40 U.S. PTO



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on June 5, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **E1580850784US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231

Carolyn Naegle
Carolyn Naegle

Attorney Docket No.: SMC1P000

First Named Inventor: HO



UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☐ Duplicate for
fee processing

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
Winga HO

For: SYNCHRONIZATION METHOD AND SYSTEM FOR KEEPING TRACK OF ENCODING HISTORY
TO MAINTAIN DIGITAL SYSTEM SYNCHRONIZATION DURING COMMUNICATION OVER LOSSY
TRANSMISSION MEDIA

Application Elements:

- ☒ 14 Pages of Specification, Claims and Abstract
- ☒ 05 Sheets of formal Drawings
- ☒ 02 Pages Combined Declaration and Power of Attorney
- ☐ Separate Declaration

Accompanying Application Parts:

- ☒ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ Separate Power of Attorney by Assignee
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☒ Information Disclosure Statement with Form PTO-1449
- ☒ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☐ Small Entity Statement(s)
- ☐ Other:

Claim For Foreign Priority

☒ Priority of U.K. Application No. 9913656.6 filed on November 6, 1999 is claimed under 35 U.S.C. § 119.

☐ The certified copy is enclosed.

☒ The certified copy will follow.

Fee Calculation (37 CFR § 1.16)

	(Col. 1) <u>NO. FILED</u>	(Col. 2) <u>NO. EXTRA</u>	<u>SMALL ENTITY</u> <u>RATE FEE</u>	<u>OR</u>	<u>LARGE ENTITY</u> <u>RATE FEE</u>
BASIC FEE			\$345 \$	OR	\$690 \$690.00
TOTAL CLAIMS	<u>11</u> -20 = <u>00</u>		x9 = \$	OR	x18 = \$
INDEP CLAIMS	<u>01</u> -03 = <u>00</u>		x39 = \$	OR	x78 = \$
[] Multiple Dependent Claim Presented			\$130 = \$	OR	\$260 = \$
* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.			Total \$	OR	Total \$690.00

☒ Check No. 7970 in the amount of \$730.00 is enclosed.

☒ The Commissioner is authorized to charge any fees beyond the amount enclosed which may be required, or to credit any overpayment, to Deposit Account No. 50-0388 (Order No. SMC1P008).

General Authorization for Petition for Extension of Time (37 CFR § 1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR § 1.17 as may be needed to Deposit Account No. 50-0388 (Order No. SMC1P008).

☒ Please send correspondence to the following address:

Customer Number 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 130
Mountain View, CA 94042-0130
Telephone (650) 961-8300
Fax (650) 961-8301



Date: JUNE 5, 2000

C. Douglass Thomas
C. Douglass Thomas
Registration No. **32,947**

**SYNCHRONIZATION METHOD AND SYSTEM FOR KEEPING
TRACK OF ENCODING HISTORY TO MAINTAIN DIGITAL
SYSTEM SYNCHRONIZATION DURING
COMMUNICATION OVER LOSSY TRANSMISSION MEDIA**

Field Of The Invention

The present invention relates to communication systems and in particular to a synchronization method and mechanism to maintain synchronization between sending and receiving digital systems communicating over a lossy
5 transmission media.

Background Of The Invention

Packet-switched digital communication networks allow digital systems to communicate with each other. In these communication networks, data to be
10 transmitted from one digital system to another is loaded into frames. The frames are then transmitted over the communication network to the destination digital system as packets. Often it is advantageous to compress the data before the data is transmitted as this reduces the amount of data to be transmitted over the communication network. It is also often desired to scramble or encrypt the data prior to transmission. When
15 compressing, scrambling or encrypting data, it is necessary to ensure the transmitting digital system and receiving digital system remain in synchronization. Otherwise, the data encoding and decoding method will operate erroneously.

U.S. Patent No. 5,130,993 to Gutman et al discloses a method for transmitting encoded data over unreliable networks wherein synchronization between
20 the encoder and decoder is maintained. When encoded data is received by one system, the data is checked for transmission errors after the data has been decoded. If an error is detected, a reset signal is sent by the receiving system to the sending system to reset its encoder to a predetermined state known to the receiving system. The corrupted data can then be resent and decoded by the receiving system. In this
25 manner, the synchronization of encoder and decoder can be maintained.

When the encoder is reset to a predetermined state, there is a reduction in encoding efficiency since the encoding algorithm must relearn its vocabulary. In prior art systems, such as that disclosed by Gutman, the predetermined state does not take advantage of encoding history between the encoder and decoder resulting in
30 reduced system performance.

It is therefore an object of the present invention to provide a novel synchronization method and mechanism for maintaining synchronism between digital systems communicating over a lossy transmission media.

5 **Summary Of The Invention**

According to one aspect of the present invention there is provided a method for transmitting encoded data between synchronized sending and receiving digital systems across a lossy transmission media, said sending and receiving digital systems maintaining encoder and decoder information records, said method

10 comprising the steps of:

encoding packet data to be transmitted by said sending digital system using encoding information in an encoder information record that has been previously acknowledged by said receiving digital system;

15 building a new encoder information record including the encoding information used to encode said packet data as well as the packet data;

transmitting the encoded packet data to said receiving digital system as a packet including a header having a packet number and a tag identifying the encoding information used to encode the packet data;

20 when the packet is received by said receiving digital system, examining the header to determine the encoding information used to encode said packet data;

decoding the packet using corresponding decoder information in said decoder information record and updating the decoder information in said decoder information record with said packet data;

25 acknowledging processing of the packet to said sending digital system to enable said sending digital system to update said encoder information so that said new encoder information record is used to encode packet data; and

when the packet is lost, conditioning said encoder information to rebuild the new encoder information without the lost packet data.

30 The present invention provides advantages in that if data packets are lost, the encoder of the sending digital system is conditioned to rebuild the unacknowledged encoder history/state information record without the missing packet

data. Encoding can continue using the current or previously acknowledged encoder history/state information records. Thus, encoding history is used to the extent possibly even when packets are lost reducing the amount of vocabulary the encoding algorithm must relearn.

5

Brief Description Of The Drawings

An embodiment of the present invention will now be described more fully with reference to the accompanying drawings in which:

Figure 1 is a schematic block diagram of a packet-switched digital
10 communication system;

Figures 2a and 2b are schematic block diagrams of sending and receiving digital systems forming part of the communication system of Figure 1 including synchronization mechanisms in accordance with the present invention;

Figures 3a and 3b are illustrations of encoder history/state information
15 records stored by the synchronization mechanism of Figure 2a;

Figures 4 to 6 are flow charts illustrating the operation of the synchronization mechanisms of Figures 2a and 2b.

Detailed Description Of The Preferred Embodiment

Turning now to Figure 1, a communication system is shown and is
20 generally indicated to by reference numeral 10. As can be seen, communication system 10 includes a pair of digital systems 12 and 14 which communicate over a lossy transmission media 16 in the form of an unreliable packet-switched digital communication network. During transmission of data from one digital system to the
25 other, the sending digital system 12 loads the data into frames. The sending digital system 12 also compresses and/or encrypts (scrambles), hereinafter referred to as "encodes", the data using encoder information known to the receiving digital system. Once encoded, the data frames are encapsulated with headers as will be described and are transmitted as packets over the lossy transmission media 16.

30 As each data packet is received, the receiving digital system 14 compares the packet number assigned to the received packet with the packet number of the expected packet to ensure each packet is received. If the packet is expected, the

receiving digital system processes the packet using decoder information. During processing, packet information is used to update the decoder information corresponding to the encoder information. Once processed, the receiving digital system 14 sends an acknowledgment (Ack) packet to the sending digital system 12 acknowledging processing of the packet thereby allowing the sending digital system to update its encoder information. If the digital systems are involved in bi-directional data exchange, acknowledgment headers are used to encapsulate data frames in order to acknowledge receipt of packets.

Since the data frames are encoded, it is necessary to ensure that the digital systems 12 and 14 remain in synchronization. Otherwise, data will be decoded erroneously. To maintain the digital systems in synchronization, each of the digital systems includes a synchronization mechanism 18 in accordance with the present invention (see Figures 2a and 2b). The synchronization mechanisms 18 establish a protocol that allows the digital systems 12 and 14 to keep track of each others encoding history and state information. Further specifics of the synchronization mechanisms 18 will now be described.

Figure 2a better illustrates the sending digital system 12. As can be seen, the digital system 12 includes an encoder 20 to encode data to be transmitted and to load the data into frames. History and state information concerning the state of the encoder 20 is recorded in memory 22. The synchronization mechanism 18 communicates with the encoder 20 and the memory 22 as well as with the lossy transmission media 16.

Figure 2b better illustrates the receiving digital system 14. As can be seen, the digital system 14 also includes a synchronization mechanism 18 and a decoder 24 to decode data received from the sending digital system 12. History and state information concerning the state of the decoder 24 is recorded in memory 26.

Figures 3a and 3b show an example of the encoder history/state information recorded in memory 22. In this case, the encoder history/state information includes three records, namely record Rec. N-1, record Rec. N and record Rec. N+1. Each record includes a sum of processed information of the previous record and the packets acknowledged by the receiving digital system 14 after acknowledgment of the packets for the previous record. Typically each record will

include the sum of processed information of the previous record plus the next packet acknowledged by the receiving digital system. However, if desired, the receiving digital system 14 can be conditioned to send acknowledgments after multiple packets have been processed. Record Rec. N-1 is encoder history/state information that has been previously acknowledged by the decoder 24. Record Rec. N is the current or most recent encoder history/state information that has been acknowledged by the decoder 24. Record Rec. N+1 is encoder history/state information that has not yet been acknowledged by the decoder 24.

When data is to be transmitted by digital system 12, the synchronization mechanism 18 encapsulates each encoded packet with a header including a number of tags. Specifically, each header includes an Encode_Hist_Tag_Used tag identifying the history/state information used by the encoder 20 to encode the packet, that has been acknowledged by the receiving digital system 14, a Pkt_Tag tag identifying the packet number assigned to the packet and an Acking_Peer_Encoder_Hist_Tag tag acknowledging the most recent decoder history/state information processed by decoder 24 that is known by the sending digital system 12.

The synchronization mechanism 18 also generates synch control (Ctl) and synch response packets. These packets are generated when the sending and receiving digital systems 12 and 14 have become unsynchronized and are used to re-synchronize them. The synch control packet includes a Ctl_Pkt_Tag tag assigning a number to the synch control packet so that it may be matched up with its corresponding synch response packet and a Last_Acked_Peer_Xmit_Hist_Tag tag identifying the last known acknowledged state at which the sending and receiving digital systems 12 and 14 were synchronized. The synch response packet also includes a Ctl_Pkt_Tag tag assigning a number to the synch response packet so that it may be matched up with its corresponding synch control packet.

The operation of the synchronization mechanisms 18 will now be described with particular reference to Figures 4 to 6. In this particular example, it will be assumed that only digital system 12 is transmitting data packets. Accordingly, in response to each received and processed packet, the receiving digital system 14 returns an acknowledgment packet.

When the sending digital system 12 initiates data transmission, the encoder 20 encodes the data to be transmitted using history/state information stored in the memory 22 that has been acknowledged by the receiving digital system 14 and loads the encoded data into frames. Accordingly, in the example of Figure 3a, the encoder 20 can use records Rec. N-1 or Rec. N to encode the data since these records have been acknowledged by the decoder 24. The encoder 20 however, cannot use record Rec. N+1 to encode the data since this record has not been acknowledged by the decoder 24. As each frame is loaded, the synchronization mechanism 18 encapsulates the frame with a header as described previously and transmits the data packet to the receiving digital system 14 over the lossy transmission media 16.

When the packet is received by the receiving digital system 14, a cyclic redundancy check (CRC) is performed on the packet to determine if the data in the packet is uncorrupted (block 100). If the packet data is corrupted, the packet is discarded (block 102) and the receiving digital system 14 awaits the next data packet (block 104). If the packet data is uncorrupted, the synchronization mechanism 18 of the receiving digital system 14 examines the packet header to determine the packet type (block 106). If the packet is a data packet, the synchronization mechanism 18 examines the Pkt_Tag tag of the header to determine if the received packet is the expected packet (block 108).

If the data packet is the expected packet, the packet is placed in a queue. Sequential packets in the queue are processed by the digital system 14 (block 112). In order to process each packet, the decoder 24 uses the Encode_Hist_Tag_Used tag of the packet header to determine the history/state information used by the encoder 20 to encode the packet data. The decoder then extracts the corresponding history/state information from the memory 26 and decodes the packet.

Once the decoder 24 has processed the packet, the decoder updates the history/state information using the packet. The decoder then generates an acknowledgment packet (block 118). The acknowledgment packet is returned to the sending digital system 12 to acknowledge receipt of the packet and inform the sending digital system 12 that it should update the encoder history/state information

used to encode packets. Following this, the receiving digital system 14 awaits receipt of the next packet (block 104).

5 If the packet number of the data packet is not the packet number of the expected packet but is within a defined range of the expected packet number, signifying the packet has been received out of sequence (block 120), the packet is placed in the queue and a packet timer for the missing packet is initiated (block 122). The receiving digital system 14 then waits for the next packet (block 104). If the missing packet is received before the packet timer expires, all sequential packets in the queue are processed at block 112 and the packet timer is stopped (block 116).

10 If the packet number of the data packet is outside of the predefined range of the expected packet number, the packet is discarded (block 102) and the receiving digital system 14 awaits receipt of the next packet (block 104).

15 If the packet timer expires before it has been stopped at block 116 (block 130), the synchronization mechanism of the receiving digital system 14 transmits a synch control packet to the sending digital system 12 signifying an unsynchronized state and informing the sending digital system 12 of its current decoder history/state information. The synchronization mechanism 18 also increments a synch control transmit counter (block 134). The synchronization mechanism 18 then starts a synch timer and awaits receipt of a synch response packet
20 from the sending digital system 12 (block 136).

After the synch control packet has been sent, the synchronization mechanism also conditions the decoder 24 to process packets in the queue until the next missing packet is detected. A variable is set to remember to where in the queue packets have been processed.

25 If a synch response packet is received (block 137) from the sending digital system 12 before the synch timer expires, the synch timer is stopped (block 138). The synchronization mechanism 18 then generates the acknowledgment packet in response to the variable set at block 132 (block 145) and the receiving digital system 14 awaits the next packet (block 104). If the synch timer expires (block 139),
30 the count of the synch control transmit counter is examined to determine if the count value exceeds a threshold (block 140). If not, the synchronization mechanism returns to block 134. Thus, the synchronization mechanism 18 transmits another synch

control packet to the sending digital system 12 and increments the synch control transmit counter.

At block 140, if the count of the synch control transmit counter is determined to equal the threshold, the link between the sending and receiving digital systems is reset (block 142).

When the sending digital system 12 receives a packet from the receiving digital system 14, the synchronization mechanism 18 checks the packet to determine if the packet is corrupted (block 100). If so, the packet is discarded (block 102). If the packet is uncorrupted, the synchronization mechanism 18 checks the packet to determine if it is a data packet (block 106). In this example, the sending digital system 12 receives from the receiving digital system 14 either acknowledgment packets signifying proper receipt of transmitted packets or synch control packets signifying an unsynchronized state between the sending and receiving digital systems 12 and 14.

If the incoming packet is an acknowledgment packet (block 146), the sending digital system 12 uses the Acking_Peer_Encoder_Hist_Tag tag of the packet header to update the history/state information of the encoder 20 so that record Rec. N+1 becomes record Rec. N. (block 118). This new encoder history/state information record Rec.N can then used by the encoder 20 to encode data since the history/state information has been acknowledged by the receiving digital system 14.

If the incoming packet is a synch control packet (block 150), the synchronization mechanism 18 of the sending digital system 12 uses the Last_Acked_Peer_Xmit_Hist_Tag tag to condition the encoder to rebuild record Rec. N+1 without using the missing packet (block 152). The synchronization mechanism 18 also sends a synch response packet to the receiving digital system 14 having a number equal to the number assigned to the received synch control packet (block 154).

As mentioned previously, when the receiving digital system 14 receives the synch response packet, the synchronization mechanism 18 matches the synch response packet with the transmitted synch control packet and stops the synch timer (block 138). The synchronization mechanism 18 then generates an acknowledgment packet acknowledging the packets in the queue that were processed

up to the set variable (block 145). At this point, the sending and receiving digital systems 12 and 14 are considered to be resynchronized and the process continues.

As will be appreciated in this embodiment, when the history/state information in the memories is being updated, multiple records of the history/state information are maintained. Alternatively, deltas reflecting changes to the history/state information records can be stored to reduce memory usage.

For example if packet $M+1$ is lost and its information is used in encoder history/state information record Rec. $N+1$, a synch control packet is sent by the synchronization mechanism 18 to the sending digital system 12 acknowledging the last processed packet M . When the synchronization mechanism 18 of the digital system 12 receives the synch control packet, it conditions the encoder 20 to discard record Rec. $N+1$ and the packet $M+1$ information, and to rebuild record Rec. $N+1$ by summing the information of record Rec. N with the information of packets $M+2, \dots, M+j$. Once all of the packets $M+2$ to $M+j$ are acknowledged by the synchronization mechanism, record Rec. $N+1$ becomes record Rec. N and the encoder can use this record to encode packets.

As will be appreciated, when the sending and receiving digital systems become unsynchronized, the encoder history/state information is conditioned to the last known point at which the digital systems were known to be synchronized and not to its initial state as is common in prior art systems. This allows synchronization between the sending and receiving digital systems to be less tightly coupled. In this manner, encoding efficiency can be maintained since prior encoder history/state information is not lost. As a result, compressibility need not be reduced significantly when packet loss is detected and retransmission of lost data is required. This is particularly attractive when transmitting packetized data over unreliable networks such as the Internet and Frame Relay and IP networks.

Also, although the encoder history/state information is described as being conditioned to the last known synchronization state of the sending and receiving digital systems, the encoder history/state information can be conditioned in some instances to other prior non-initial states. Of course, conditioning the encoder history/state information to the last known synchronization state increases encoding efficiency.

Although the receiving digital system is described as sending acknowledgment packets to the sending digital system in response to received packets, those of skill in the art will appreciate that bi-directional communication between the digital systems can occur. In this instance, packet acknowledgment
5 headers are used to encapsulate data frames to be transmitted by the receiving digital system to acknowledge receipt of the packets.

Although a preferred embodiment of the present invention has been described, those of skill in the art will appreciate that variations and modifications may be made without departing from the spirit and scope thereof as defined by the
10 appended claims.

We Claim:

1. A method for transmitting encoded data between synchronized sending and receiving digital systems across a lossy transmission media, said sending and receiving digital systems maintaining encoder and decoder information records, said method comprising the steps of:

encoding packet data to be transmitted by said sending digital system using encoding information in an encoder information record that has been previously acknowledged by said receiving digital system;

- 10 building a new encoder information record including the encoding information used to encode said packet data as well as the packet data;

transmitting the encoded packet data to said receiving digital system as a packet including a header having a packet number and a tag identifying the encoding information used to encode the packet data;

- 15 when the packet is received by said receiving digital system, examining the header to determine the encoding information used to encode said packet data;

decoding the packet using corresponding decoder information in said decoder information record and updating the decoder information in said decoder

- 20 information record with said packet data;

acknowledging processing of the packet to said sending digital system to enable said sending digital system to update said encoder information so that said new encoder information record is used to encode packet data; and

- 25 when the packet is lost, conditioning said encoder information to rebuild the new encoder information without the lost packet data.

2. The method of claim 1 wherein said conditioning step is performed when a packet is received out of sequence and a predetermined amount of time elapses without said missing packet being received.

30

3. The method of claim 2 wherein packets received out of sequence are stored in a queue and wherein a packet timer is initiated to count said predetermined

amount of time when a packet is received out of sequence, said packet timer being stopped when said missing packet is received.

4. The method of claim 3 wherein said conditioning step includes the step
5 of sending a synch control packet to said sending digital system, said synch control packet including a tag identifying the last processed packet, said sending digital system using said synch control packet to rebuild said new encoder information record.

10 5. The method of claim 4 wherein said conditioning step further includes the steps of initiating a synchronization timer when said synch control packet is sent; stopping said timer when an acknowledgment is received from said sending digital system in response to said synch control packet; and resending the synch control packet and reinitiating the synchronization timer if said synchronization timer expires
15 and an acknowledgment has not been received.

6. The method of claim 5 wherein said conditioning step further includes the steps of incrementing a counter each time a synch control packet is sent; comparing the value of said counter to determine if the value equals a threshold prior
20 to resending the synch control packet and reinitiating the synchronization timer; and resetting the communication link between said sending and receiving digital systems if the value of said counter equals said threshold value.

7. The method of claim 1 wherein during said acknowledging step, an
25 acknowledgment packet is returned to said sending digital system, said acknowledgment packet including identifying the last packet processed by said receiving digital system.

8. The method of claim 1 wherein during said acknowledging step, an
30 acknowledgment header encapsulating data packets is returned to said sending digital system, said acknowledgment header identifying the last packet processed by said receiving digital system.

ABSTRACT

A method for transmitting encoded data between synchronized sending and receiving digital systems across a lossy transmission media, said sending and receiving digital systems maintaining encoder and decoder information records, said method comprising the steps of:

encoding packet data to be transmitted by said sending digital system using encoding information in an encoder information record that has been previously acknowledged by said receiving digital system;

building a new encoder information record including the encoding information used to encode said packet data as well as the encoded packet data;

transmitting the encoded packet data to said receiving digital system as a packet including a header having a packet number and a tag identifying the encoding information used to encode the packet data;

when the packet is received by said receiving digital system, examining the header to determine the encoding information used to encode said packet data;

decoding the packet using corresponding decoder information in said decoder information record and updating the decoder information in said decoder information record using said packet;

acknowledging processing of the packet to said sending digital system to enable said sending digital system to update said encoder information so that said new encoder information record is used to encode packet data; and

when the packet is lost, conditioning said encoder information to rebuild the new encoder information without the lost packet data.

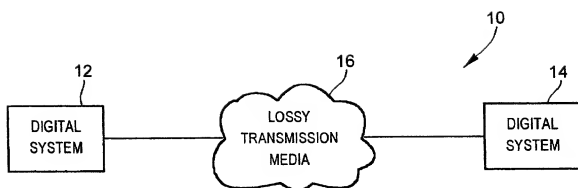


FIG. 1

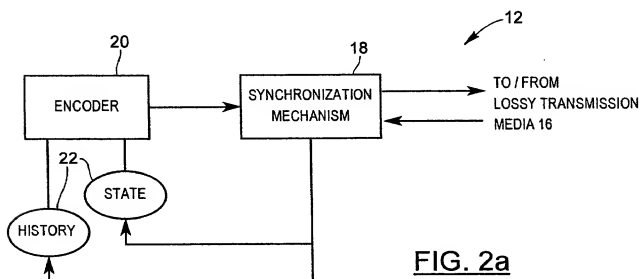


FIG. 2a

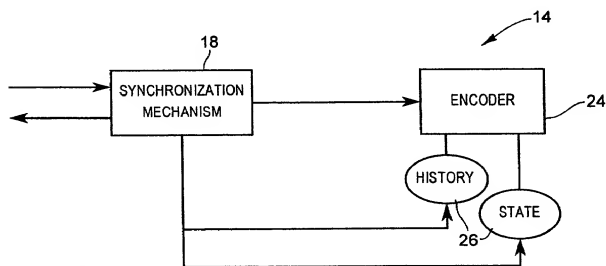


FIG. 2b

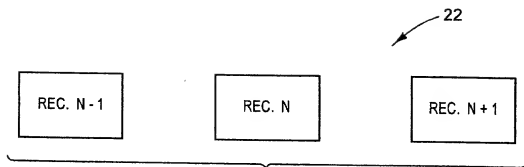


FIG. 3a

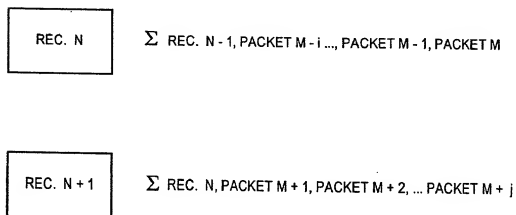


FIG. 3b

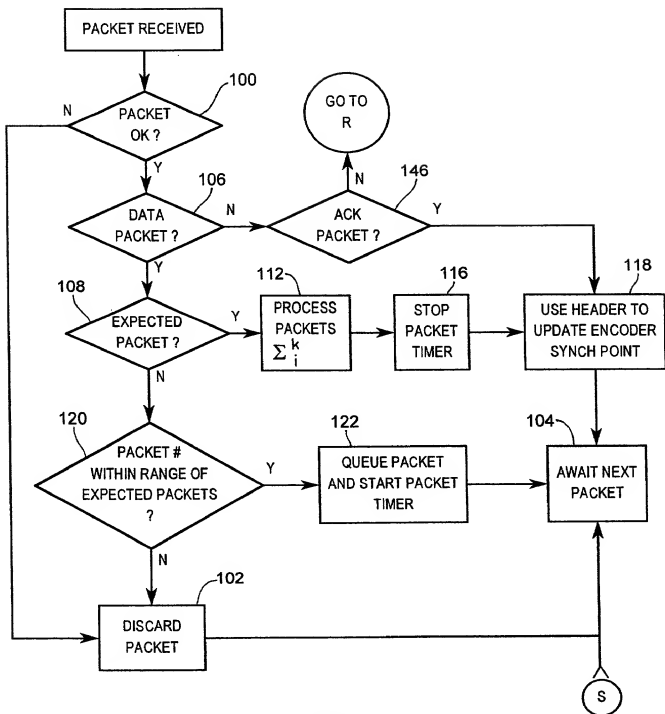


FIG. 4

```
graph TD
    Start(( )) --> 130{PACKET  
TIMER EXPIRED  
?}
    130 -- N --> Start
    130 -- Y --> 134[TRANSMIT SYNCH C + L  
AND INCREMENT SYNCH  
C + L TRANSMIT COUNTER]
    134 --> 136[AWAIT SYNCH RESPONSE  
AND START SYNCH TIMER]
    136 --> 137{SYNCH  
RESPONSE  
RECEIVED?}
    137 -- Y --> T((T))
    137 -- Y --> 138[STOP  
SYNCH  
TIMER]
    138 --> 145[TRANSMIT ACK  
USING VARIABLE]
    145 --> S((S))
    137 -- N --> 139{SYNCH  
TIMER  
EXPIRED?}
    139 -- Y --> 140{SYNCH C + L  
TRANSMIT COUNTER  
= MAX?}
    139 -- N --> 137
    140 -- Y --> 142[RESET LINK]
    140 -- N --> 137
```

FIG. 5

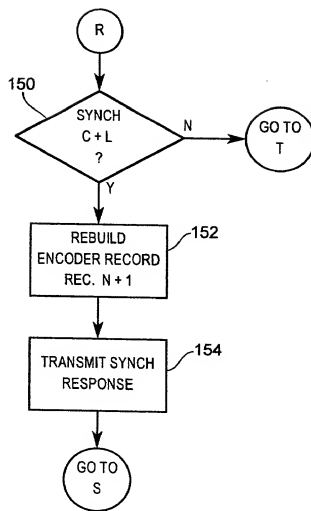


FIG. 6

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

As below named inventor, I hereby declare that:

My post office addresses and citizenships are as stated below next to my name.

I believe I am the original, and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYNCHRONIZATION METHOD AND SYSTEM FOR KEEPING TRACK OF
ENCODING HISTORY TO MAINTAIN DIGITAL SYSTEM SYNCHRONIZATION
DURING COMMUNICATION OVER LOSSY TRANSMISSION MEDIA**

the specification of which filed concurrently herewith.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign applications for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATIONS

PRIORITY CLAIMED

9913656.6	U.K.	11/06/1999	X	
(Number)	(Country)	(Day/Month/Year)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States applications listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

N/A

(Application Serial No.) (Filing Date) (Status) (Patented, pending, abandoned)

And I hereby appoint the law firm of **Beyer Weaver & Thomas, LLP** and all practitioners who are associated with the Customer Number 022434 as my principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Direct Correspondence to:

Customer Number: 022434
Beyer Weaver & Thomas, LLP
P.O. Box 130
Mountain View, CA 94042-0130



Direct Telephone Calls To:

C. Douglas Thomas at (650) 961-8300

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor:

Winga HO

Inventor's signature:

A handwritten signature of Winga HO, written in black ink over a horizontal line.

Date:

A handwritten date "May 15/2000" written in black ink over a horizontal line.

Citizenship: **Canadian**

Residence:

20 Millman Court, Kanata, Ontario, K2L 2P5, Canada

Post Office Address:

Same as Residence Address Noted Above